

# ELEGANCE

Carbe


Art.	Heating capacity 55/45/20°C (W)	Heating capacity 75/65/20°C (W)	Heating capacity 90/70/20°C (W)	Total weight, inc. components and packaging (kg)	Internal volume (dm <sup>3</sup> )	Recommended capacity of electric heating element (l)
**204	138	284	355	4,915	1,683	150
**205	169	348	435	5,8	1,93	300
**206	164	336	420	5,665	2,051	300
**207	234	480	600	6,6	2,334	300
**208	202	416	520	7,495	2,423	150
**209	245	504	630	8,6	2,776	300
**212	199	408	510	6,6	2,177	300
**213	232	476	595	7,8	2,616	300
**214	286	588	735	9,8	3,13	300
**215	327	672	840	11,8	3,483	600



Piping connection points:



Connection points for electric heating element  
ATTENTION:  
Heat is, heating element should be connected to the  
lower part of the radiator.

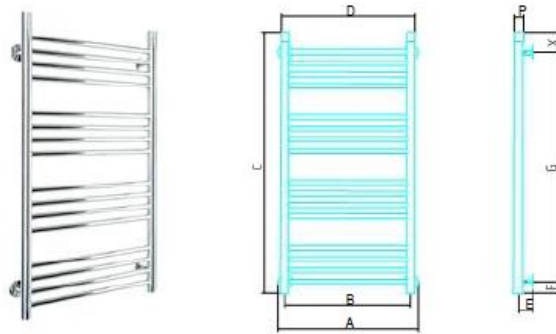

Art.	A	B	C	D	E	F	G	X	P	K
**204	358	300	758	332	54-70	80	562	116	32	69-85
**205	458	400	758	432	54-70	80	562	116	32	69-85
**206	358	300	958	332	54-70	80	752	116	32	69-85
**207	458	400	958	432	54-70	80	752	116	32	69-85
**208	358	300	1158	332	54-70	80	962	116	32	69-85
**209	458	400	1158	432	54-70	80	962	116	32	69-85
**212	558	500	758	532	54-70	80	562	116	32	69-85
**213	558	500	958	532	54-70	80	752	116	32	69-85
**214	558	500	1158	532	54-70	80	962	116	32	69-85
**215	658	600	1158	632	54-70	80	962	116	32	69-85

