


NORDIC

Carbe

Art	Heating capacity 55/45/20°C (W)	Heating capacity 75/65/20°C (W)	Heating capacity 90/70/20°C (W)	Total weight, inc. components and packaging (kg)	Internal volume (dm ³)
**030				3,8	1,284
**031	94	192	240	4,2	1,437
**032	109	224	280	4,805	1,589
**033	123	252	315	5,2	1,846
**034	134	276	345	5,8	2,075
**035	156	320	400	6,6	2,303
**036	179	368	460	6,24	2,314
**037	167	344	430	7	2,593
**038	193	396	495	7,8	2,872
**039	220	452	565	7,6	2,571
**040	187	384	480	8,6	2,876
**041	216	444	555	9,2	3,181
	245	504	630		



Piping connection points:

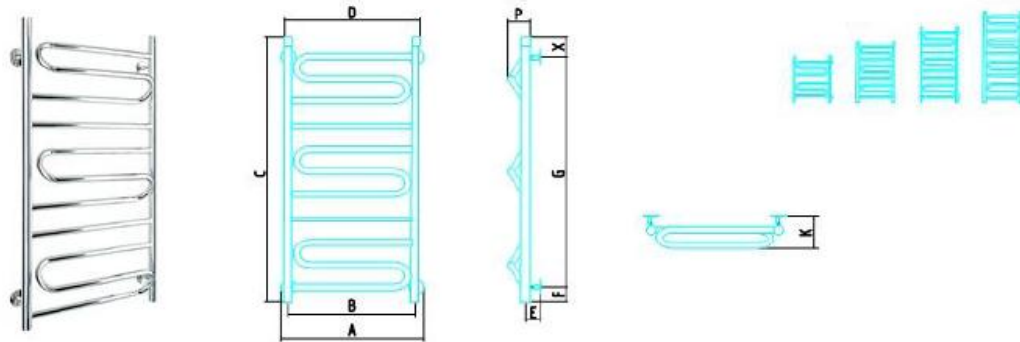

Art	A	B	C	D	E	F	G	X	P	K
**030				423	54-70	80	362	116	80	119-135
**031	458	400	558	532	54-70	80	352	116	80	119-135
**032	568	500	558	632	54-70	80	352	116	80	119-135
**033	668	600	558	432	54-70	80	562	116	80	119-135
**034	458	400	758	532	54-70	80	562	116	80	119-135
**035	568	500	758	632	54-70	80	562	116	80	119-135
**036	668	600	758	432	54-70	80	762	116	80	119-135
**037	458	400	958	532	54-70	80	762	116	80	119-135
**038	568	500	958	632	54-70	80	762	116	80	119-135
**039	668	600	958	432	54-70	80	962	116	80	119-135
**040	458	400	1158	532	54-70	80	962	116	80	119-135
**041	568	500	1158	632	54-70	80	962	116	80	119-135
	668	600	1158							

Coloring:



5200X
Without coating



5300X
Gold



5400X
Chameleon



5500X
Black Pearl